

Lo-OmniRoll



LOR-30 Features:

- Optional Pneumatic Nail Gun or Hammer Installed.
- Two Coils of 1 $\frac{3}{4}$ " Nails Provided.
- Patented Design Brings You The Truly Functional Roll Out.
- Compact 30 Foot Roll Is Easy To Handle.
- Superior Weather Protection and Performance with No Filter to Clog.
- Exterior Convolute Baffles - Incurved Design Allows Flexibility to Roll Up and Out While Maintaining its Shape.
- Can be Cut At One Foot Intervals - Multiple Cut Lines Eliminates Unnecessary Scrap.
- Patented Molded Fanfold End Plugs - No Accessories or Alterations Needed.
- Molded Centerline for Fast and Easy Alignment.
- Field Tested Design - Proven Effective Under All Weather Conditions.
- The Air Flow Acceleration Design - Maximizes Ventilation Capacity.
- Omni Baffles Means Air Flow From Any Direction.
- Nail Holes Marked Every 6 inches - Supported Every Foot - Will Not Crush Down.
- Full 11 Sq. In. of Net Free Area per Linear Foot.
- Engineered Material Guarantees Longevity.
- 30 Year Transferable Warranty.

LOR-30 Ventilation Guide

(Attic floor space) in square feet

| Area Ventilated | 1000 | 1500 | 2000 | 2500 | 3000 | 3500 |
|-----------------------------------|------|------|------|------|------|------|
| Required length(feet) | 22 | 33 | 44 | 55 | 66 | 77 |
| Intake Required(in ²) | 242 | 363 | 484 | 605 | 726 | 847 |


Lomanco's LOR-30 Lo-OmniRoll Shingle Over Specifications

| Net Free Area | Color | Size | Roof Pitch | Packaging |
|-------------------------------|-------|--------------|-----------------|----------------|
| 11 Sq. Inches Per Linear Foot | Black | 30 Foot Roll | Any Up To 16/12 | 1 Roll Per Box |

Innovative Aerodynamic Curved Internal Baffles

Compact Roll For Easy Handling

Unique Omni Baffles Enhance Air Flow From Any Direction

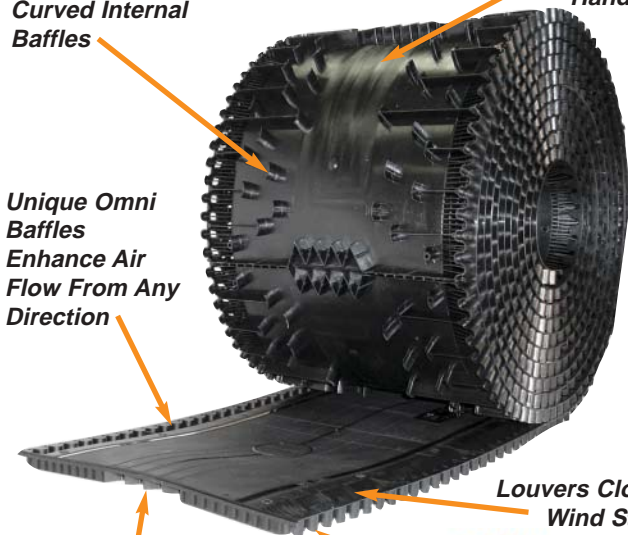

Louvers Close to Wind Stream

Molded-In Endplug

Convolute Exterior Baffle Design

LO448